


www.texwipe.eu

# **Wicrofiber** Dy I SterileDy I Sterile



# Cleanroom Wipers Alpha®1 Microfiber

### TECHNICAL DATA SHEET

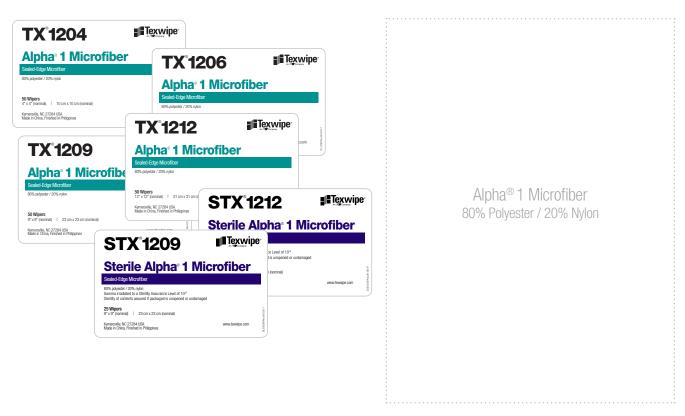

Products					
Number	Description	Sterile	Packaging	Case	
Dry Wipers – Alpha® 1 Microfiber					
TX1204	4" x 4" (10 cm x 10 cm) dry		100 wipers/bag (2 bags of 50 wipers)	20 bags	
TX1206	6" x 6" (15 cm x 15 cm) dry		100 wipers/bag (2 bags of 50 wipers)	20 bags	
TX1209	9" x 9" (23 cm x 23 cm) dry		100 wipers/bag (2 bags of 50 wipers)	10 bags	
TX1212	12" x 12" (31 cm x 31 cm) dry		100 wipers/bag (2 bags of 50 wipers)	10 bags	









# TECHNICAL DATA SHEET

# Description

Alpha<sup>®</sup> 1 Microfiber is made from 80% polyester / 20% nylon material with a sealed edge, cleanroom manufactured.

Available dry (Alpha® 1 Microfiber) and sterile.

### **Applications**

- Wiping and cleaning surfaces, equipment and parts.
- Applying and removing lubricants, adhesives, residues and other solutions including disinfectants.
- Cleaning with solvents such as isopropyl alcohol (IPA), acetone, and degreasers.
- Appropriate for use with temperatures less than 400°F (205°C).

# Industries

Aerospace	Animal Laboratory	Biologics
Cleanroom Design/Build	Compounding Pharmacies	Data Storage
Facilities Maintenance	Industrial	Laboratory
Medical Device	Microelectronics	Pharmaceutical
Printing/Graphics	Semiconductor	USP <797> / USP <800>

# **Features & Benefits**

- Alpha<sup>®</sup> 1 Microfiber offers increased lifting and capturing of particles as small as microbes.
- Quick wicking performance, ideal for streak-free cleaning and spill control.
- Ideal for wiping surfaces susceptible to scratching.
- Unique microfiber construction allows the removal of oils and fingerprints.
- Manufactured to provide low levels of particles and extractables creating a wiper suitable for critical cleaning and wiping.
- Meets USP <797> and USP <800> wiper requirements.
- Autoclave safe.
- Individually lot coded for ease of traceability and quality control.

# **Cleanroom Environment**

- ISO Class 3 − 7
- Class 1 10,000
- EU Grade A D

### **Shelf Life**

- Non-Sterile (Dry) 5 years from date of manufacture
- Sterile (Dry) 3 years from date of manufacture

Custom products available upon request.





# TECHNICAL DATA SHEET

### **Performance Characteristics**

Property	Typical Value	Test Method*	
Particles and Fibers			
LPC: ≥0.5 µm	10.1 x 10 <sup>6</sup> particles/m <sup>2</sup>	1, TM22	
Fibers: >100 µm	780 fibers/m <sup>2</sup>	2, TM22	
Nonvolatile Residue			
IPA extractant	0.20 g/m <sup>2</sup>	1, TM1	
DIW extractant	0.08 g/m <sup>2</sup>	1, TM1	
Ethanol extractant	0.01 g/m <sup>2</sup>	1, TM1	
lons			
Sodium	0.20 ppm	1, TM18	
Potassium	0.02 ppm	1, TM18	
Chloride	0.10 ppm	1, TM18	

### **Physical Characteristics**

Property	Typical Value	Test Method*
Absorbency Sorptive capacity Sorptive rate	320 mL/m <sup>2</sup> <0.3 second	1, TM20 1, TM20
Basis Weight	185 g/m <sup>2</sup>	1, TM20

### \*Test Methods

- 1 "Evaluating Wiping Materials Used in Cleanroom and Other Controlled Environments," IEST-RP-CC004.3, Institute for Environmental Sciences and Technology, Rolling Meadows, IL, 2004; www.iest.org.
- 2 E2090-12, "Standard Test Method for Size-Differentiated Counting of Particles and Fibers Released from Cleanroom Wipers Using Optical and Scanning Electron Microscopy," ASTM International, West Conshohocken, PA, 2012; www.astm.org.
- TM Refers to Texwipe Test Method available upon request. Contact Texwipe Customer Service at www.texwipe.eu or info@texwipe.com for a copy.

Note: The data in this table represent typical analyses.

### For sterile products:

- Irradiated to a Sterility Assurance Level of 10<sup>-6</sup> according to AAMI Guidelines.
- Certificates of Compliance, Analysis and Irradiation attached to each case.
- Sterile Validation Documentation available upon request.

### Texwipe holds ISO 9001:2015 registration.

All Texwipe products conform to GHS classification for labeling (where applicable). Shipping classification based on weight of inner package.

